

ELECTROTECH INDUSTRIES

☎ 9822591211 / 8999253749 / 9823608441

✉ electrotechindustries24@gmail.com



Office :  7350484501



**PLOT NO 01, Gat NO 158, Mahalunge Talegaon Chakan Road,
Near Sigma Company Taluka Khed, Chakan, Pune-410501**

GSTIN/UIN : 27AAKFE8427B1ZH State Name : Maharashtra, Code: 27

Size IN MM Width	18 SWG (APP. 1.20 MM.)			
	HEIGHT			COVER
50	25 MM	50 MM	75 MM	15 MM
75	25 MM	50 MM	75 MM	15 MM
100	25 MM	50 MM	75 MM	15 MM
150	25 MM	50 MM	75 MM	15 MM
200	25 MM	50 MM	75 MM	15 MM
250	25 MM	50 MM	75 MM	15 MM
300	25 MM	50 MM	75 MM	15 MM
400	25 MM	50 MM	75 MM	15 MM
450	25 MM	50 MM	75 MM	15 MM
500	25 MM	50 MM	75 MM	15 MM
600	25 MM	50 MM	75 MM	15 MM
750	25 MM	50 MM	75 MM	15 MM
800	25 MM	50 MM	75 MM	15 MM

Size IN MM Width	16 SWG (APP. 1.60 MM.)			
	HEIGHT			COVER
50	25 MM	50 MM	75 MM	15 MM
75	25 MM	50 MM	75 MM	15 MM
100	25 MM	50 MM	75 MM	15 MM
150	25 MM	50 MM	75 MM	15 MM
200	25 MM	50 MM	75 MM	15 MM
250	25 MM	50 MM	75 MM	15 MM
300	25 MM	50 MM	75 MM	15 MM
400	25 MM	50 MM	75 MM	15 MM
450	25 MM	50 MM	75 MM	15 MM
500	25 MM	50 MM	75 MM	15 MM
600	25 MM	50 MM	75 MM	15 MM
750	25 MM	50 MM	75 MM	15 MM
800	25 MM	50 MM	75 MM	15 MM

Size IN MM Width	14 SWG (APP. 2.00 MM.)			
	HEIGHT			COVER
50	25 MM	50 MM	75 MM	15 MM
75	25 MM	50 MM	75 MM	15 MM
100	25 MM	50 MM	75 MM	15 MM
150	25 MM	50 MM	75 MM	15 MM
200	25 MM	50 MM	75 MM	15 MM
250	25 MM	50 MM	75 MM	15 MM
300	25 MM	50 MM	75 MM	15 MM
400	25 MM	50 MM	75 MM	15 MM
450	25 MM	50 MM	75 MM	15 MM
500	25 MM	50 MM	75 MM	15 MM
600	25 MM	50 MM	75 MM	15 MM
750	25 MM	50 MM	75 MM	15 MM
800	25 MM	50 MM	75 MM	15 MM

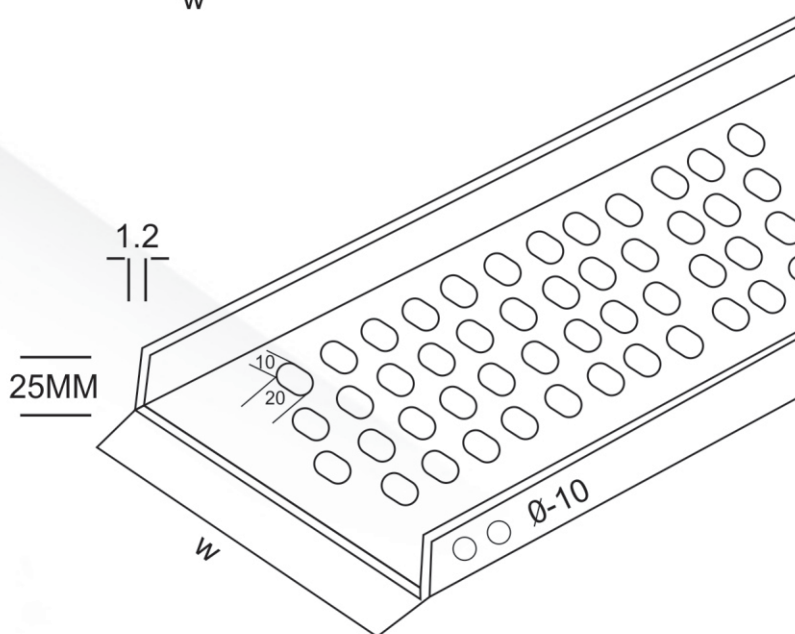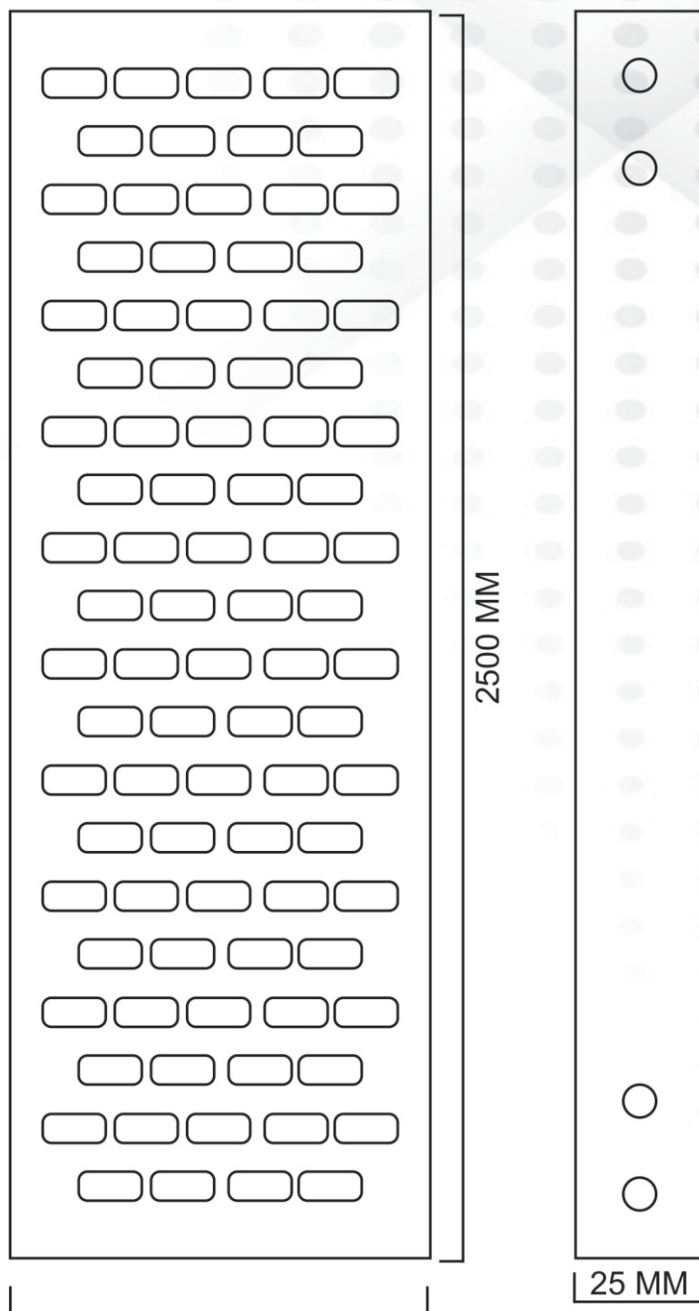



G.I./HOT DEEP GALVANISED LADDER TYPE CABLE TRAYS

Size IN MM Width	16 SWG (APP. 1.6 MM.)		
	HEIGHT		
150	50 MM	75 MM	100 MM
200	50 MM	75 MM	100 MM
300	50 MM	75 MM	100 MM
400	50 MM	75 MM	100 MM
450	50 MM	75 MM	100 MM
500	50 MM	75 MM	100 MM
600	50 MM	75 MM	100 MM
750	50 MM	75 MM	100 MM
800	50 MM	75 MM	100 MM
900	50 MM	75 MM	100 MM
1000	50 MM	75 MM	100 MM

Size IN MM Width	14 SWG (APP. 2 MM.)		
	HEIGHT		
150	50 MM	75 MM	100 MM
200	50 MM	75 MM	100 MM
300	50 MM	75 MM	100 MM
400	50 MM	75 MM	100 MM
450	50 MM	75 MM	100 MM
500	50 MM	75 MM	100 MM
600	50 MM	75 MM	100 MM
750	50 MM	75 MM	100 MM
800	50 MM	75 MM	100 MM
900	50 MM	75 MM	100 MM
1000	50 MM	75 MM	100 MM

Size IN MM Width	12 SWG (APP. 2.50 MM.)		
	HEIGHT		
150	50 MM	75 MM	100 MM
200	50 MM	75 MM	100 MM
300	50 MM	75 MM	100 MM
400	50 MM	75 MM	100 MM
450	50 MM	75 MM	100 MM
500	50 MM	75 MM	100 MM
600	50 MM	75 MM	100 MM
750	50 MM	75 MM	100 MM
800	50 MM	75 MM	100 MM
900	50 MM	75 MM	100 MM
1000	50 MM	75 MM	100 MM


Size IN MM Width	10 SWG (APP. 3 MM.)		
	HEIGHT		
150	50 MM	75 MM	100 MM
200	50 MM	75 MM	100 MM
300	50 MM	75 MM	100 MM
400	50 MM	75 MM	100 MM
450	50 MM	75 MM	100 MM
500	50 MM	75 MM	100 MM
600	50 MM	75 MM	100 MM
750	50 MM	75 MM	100 MM
800	50 MM	75 MM	100 MM
900	50 MM	75 MM	100 MM
1000	50 MM	75 MM	100 MM

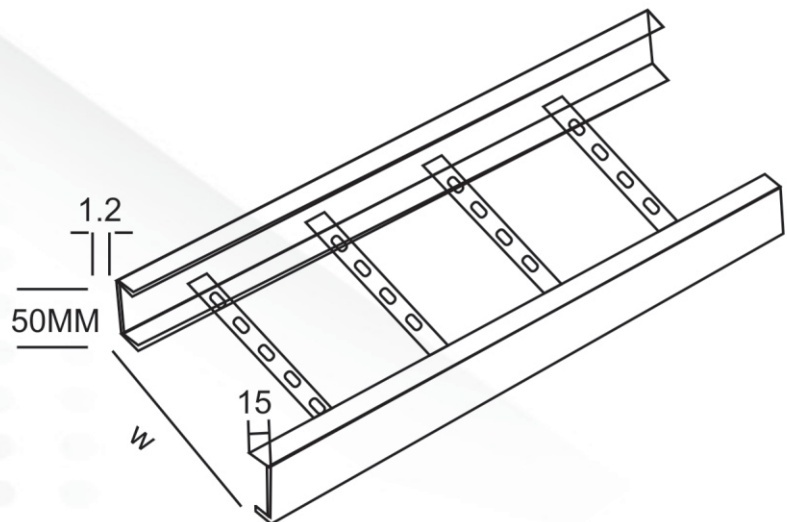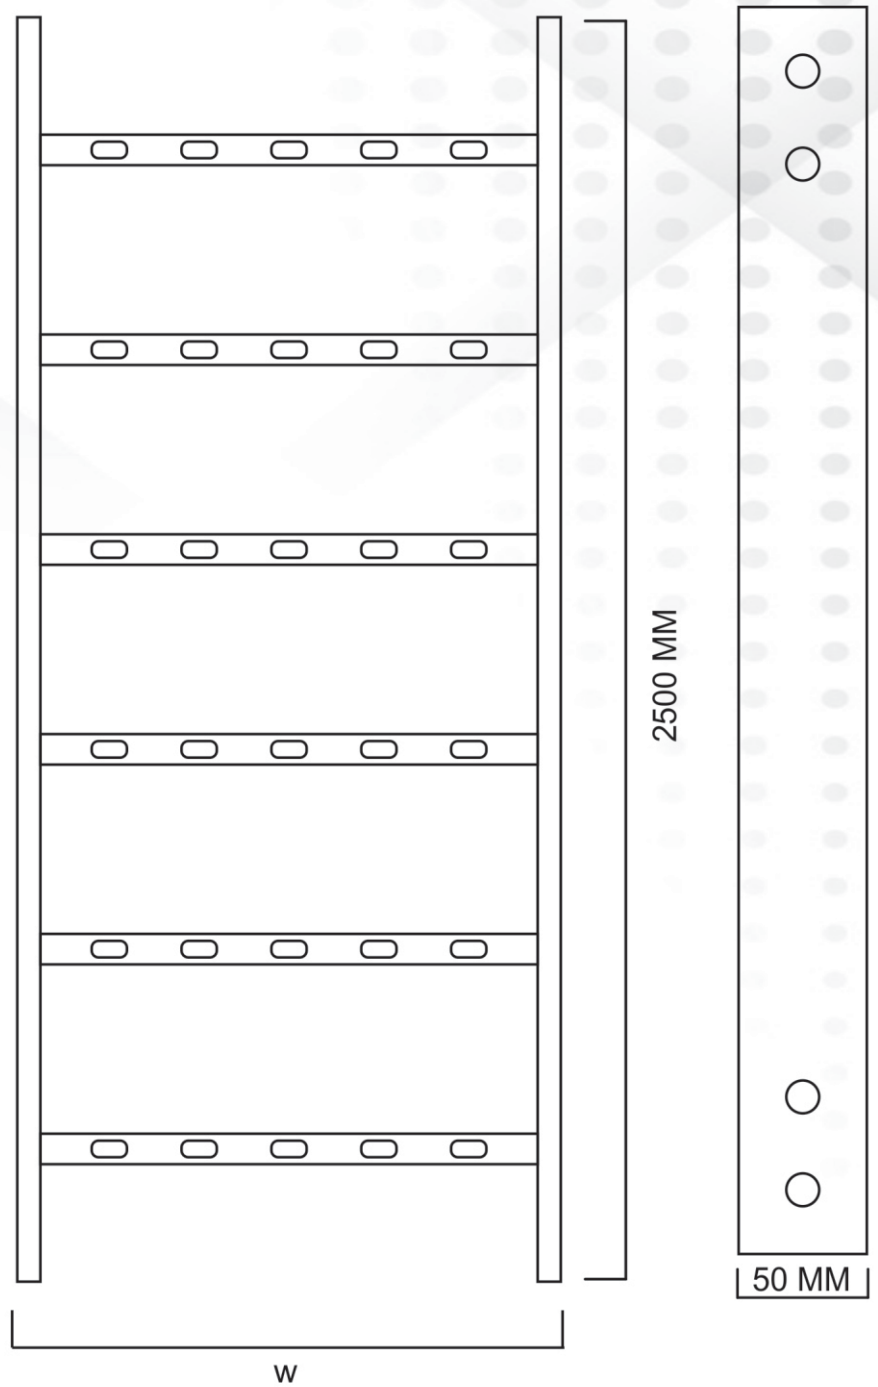

Copper & GI Earthing Items

Weight/Length Unit Conversion Table (Approx.)


No.	Item Type	Size	Copper Weight (kg)	Equiv Length (mtr)	GI Weight (kg)
1	Strip/Patti	20x3	X	1	0.5
2	Strip/Patti	25x3	0.7	1	0.7
3	Strip/Patti	25x4	0.9	1	X
4	Strip/Patti	25x5	1.1	1	X
5	Strip/Patti	25x6	1.4	1	1.3
6	Strip/Patti	32x3	0.85	1	X
7	Strip/Patti	32x6	1.6	1	1.6
8	Strip/Patti	38x6	2.1	1	
9	Strip/Patti	50x3	1.35	1	2
10	Strip/Patti	50x5	2.25	1	2.5
11	Strip/Patti	50x6	2.5	1	2.6
12	Strip/Patti	50x8	X	1	3.4
13	Strip/Patti	75x6	4	1	

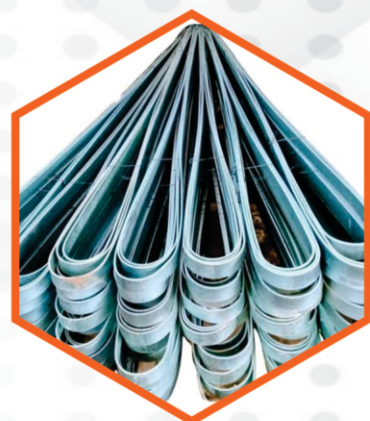

EARTHINGELECTRODES

GI EARTHINGELECTRODES

- ▶ Hotdippedgalvanizedfor corrosion protection
- ▶ Suitablefor soil with Ph range 5.0 to 8.0
- ▶ Pipe in strip and pipe in pipe both technologies are available
- ▶ Internal conductive material designed to achieve long term lowest resistance
- ▶ Available series: DE-GI-76/3, DE-GI-78/6, DE-GI-48/3, DE-GI-48/6



EARTHINGELECTRODES

COPPER BONDED EARTHINGELECTRODES

- ▶ Copper coated (254 micron) for corrosion protection
- ▶ Suitable for soil with Ph range 5.0 to 8.0
- ▶ Pipe in strip and pipe in pipe both technologies are available
- ▶ Solid copper bonded rod from 8mm to 48mm (from 50 micron to 950 micron)
- ▶ Internal conductive material designed to achieve long term lowest resistance
- ▶ Available series: DE-CB-76/3, DE-CB-78/6, DE-CB-48/3, DE-CB-48/6



For Enquiry Pl. Contact :

☎ 9822591211 / 8999253749 / 9823608441 / Office : ☎ 7350484501

✉ electrotechindustries24@gmail.com

Thank You..!